

luminous flux:	5500 lm	4000 lm	3000 lm
maximum power:	70W	40W	35W
rated voltage:	12÷24V DC		
permissible voltage:	10,5÷30V DC		
current at 13,2V:	4,5A	2,4A	1,9A
current at 28V:	2A	1,1A	0,9A
maximum current:	4,5A	3,5A	2,5A
colour temperature:	5500÷6000K	5000÷5500K	5500÷6000K
beam:	wide		
beam angle:	60° x 25°		
IP rating:	IP67, IP69K, IP66		
work temperature:	-40°C ÷ 80°C		
housing's material:	aluminium		
lens' material:	plastic		
corrosion resistance:	ISO 9227, 500h		
vibration resistance:	15,3G 24÷2000Hz		
EMC Class CISPR 25:	IV	III	
built-in connectors:	Deutsch DT, AMP Faston 250, AMP SuperSeal 1,5		
other:	protection: - against overheating - against reverse polarisation		



Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels.

They can be installed in an upright or upside down position.

The bracket parts are made of Inox steel.


It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:


Deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

AMP Faston 250 plug 2-pin - cat. No. A.07138

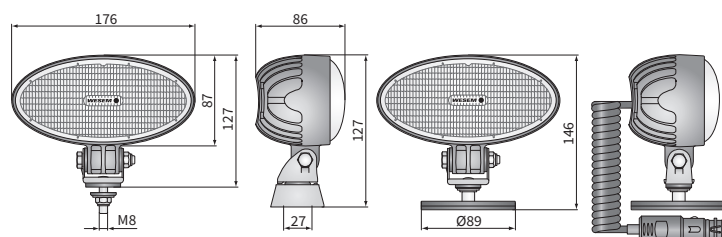

Illumination of 1 lux is sufficient light to read a newspaper
Lamp positioning: 8° from the vertical plane h=2,5m

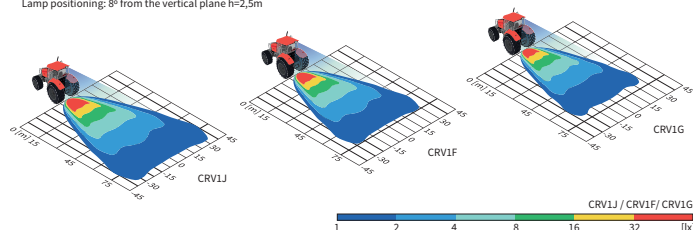

Cat. number	Hella Catal. No.	Luminous flux	IP rating	Accessories	Bracket	Connectors
CRV1J.56001		✓			✓	
CRV1J.56003		✓			✓	
CRV1J.56014		✓			✓	
CRV1J.56051		✓			✓	
CRV1F.53201		✓			✓	
CRV1F.53206		✓	✓		✓	
CRV1F.53204		✓			✓	
CRV1F.53202		✓			✓	
CRV1F.53203		✓			✓	
CRV1F.53212		✓			✓	
CRV1F.53251		✓			✓	
CRV1G.53101		✓			✓	
CRV1G.53106		✓	✓		✓	
CRV1G.53114	1GB 996 386-001	✓			✓	
CRV1G.53102	1GB 996 386-031	✓			✓	
CRV1G.53113		✓			✓	
CRV1G.53121		✓			✓	
CRV1G.53126		✓	✓		✓	
CRV1G.53134		✓			✓	
CRV1G.53133		✓			✓	